
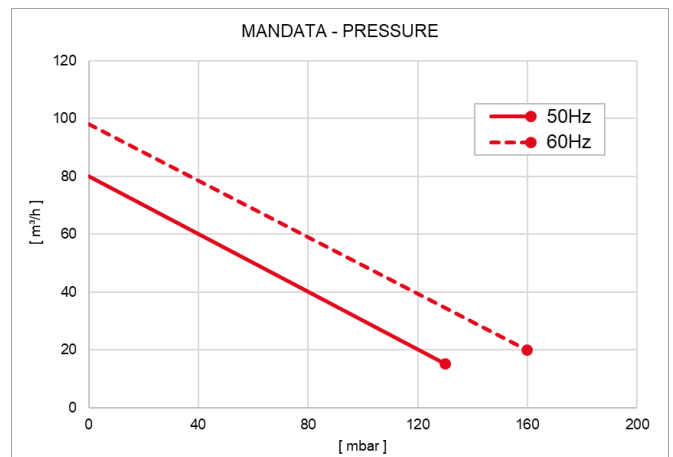


Modello - Model		TSL 80	
		50Hz	60Hz
Codice catalogo - Catalogue code		9412016	
Potenza motore - Motor power (3~) kW		0.4	0.5
IE3	Alimentazione - Power supply V±10% (Δ / Y)	230 / 400	265 / 460
	Efficienza - Efficiency %	77.6	77.0
Alimentazione - Power supply V±5% (Δ / Y)		200-240 / 345-415	220-275 / 380-480
Assorbimento - Absorption A (Δ / Y)		2.9-2.4 / 1.7-1.4	3.2-2.5 / 1.8-1.4
Portata - Flow rate m³/h		80	98
Vuoto - Vacuum mbar		-120	-150
Sovrappressione - Pressure mbar		+130	+160
Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A)		53	56
Peso - Weight kg [N]		10 [98.06]	

Subject to change without prior notice

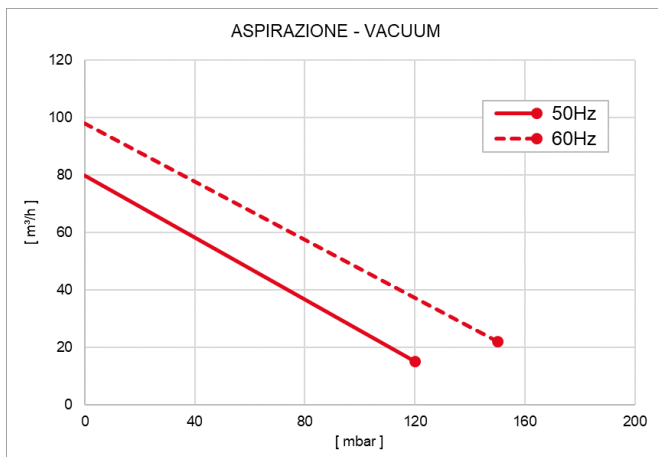

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
 Curves refer to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)